



# 300PSI OS & Y Grooved End Gate Valve

## ANI VALVE

P/N : AV-OG-GG300

### Resilient Wedge OS & Y Gate Valve - Grooved End

#### Technical Features

**Nominal Pressure:** 300PSI

**Grooved Standard:** Metric or ANSI / AWWA C606

**Sizes:** 2 1/2" , 3" , 4" , 5" , 6" , 8" , 10" , 12"

**Face to Face Standard :** ASME B 16.10

**Working Pressure:** 300 PSI (Maximum Testing Pressure 600 PSI)

conforms to UL 262


**Working Temperature Range:** 0C°-80C°(32°F-176°F)

**Coating Details:** Epoxy coated interior and exterior by Electrostatic Spray or coating upon request

**NPT plug on body** with 2 operating nuts

**Certified** lead-free by NSF / ANSI 61 & NSF / ANSI 372 is available

**Approval:** UL

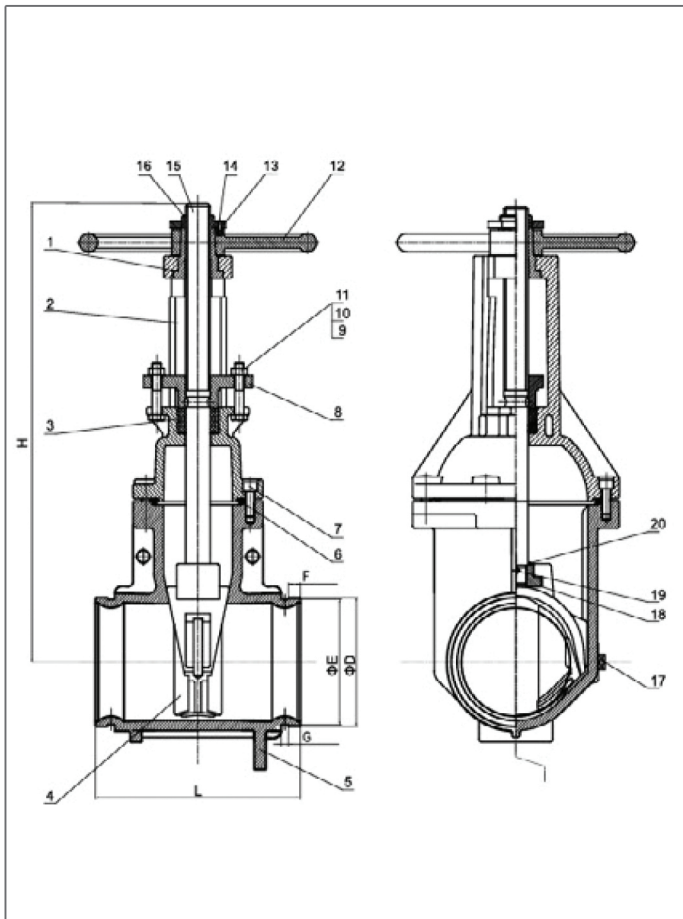

#### Valve Material List

NO	Name	Material	Standard
1	Gasket	Stainless Steel 304 or C95400	ASTM B148
2	Bonnet	Ductile Iron	ASTM A536 Grade 65-45-12
3	Packing	Graphite	
4	Disc	Ductile Iron + EPDM	ASTM A536 Grade 65-45-12+ASTM D 2000
5	Body	Ductile Iron	ASTM A536 Grade 65-45-12
6	sealing Ring	EPDM	ASTM D2000
7	Bolt	Stainless Steel 304 or Steel1045	ASTM A29
8	Gland	Ductile Iron	ASTM A536 Grade 65-45-12
9	Nut	Stainless Steel 304 or Steel 1045	ASTM A29
10	Flat Washer	Stainless Steel 304 or Steel 1045	ASTM A29
11	Bolt	Stainless Steel 304 or Steel 1045	ASTM A29
12	Handwheel	Ductile Iron	ASTM A536 Grade 65-45-12
13	Lock Nut	C95400	ASTM B148
14	Locating Screw	Stainless Steel 304 or Steel 1045	ASTM A276
15	Stem	Stainless Steel 304 or C95400	ASTM A276
16	Stem Nut	C95400	ASTM B148
17	Plug	C95400	ASTM B148
18	Lifting Nut	CF8/CF8M or C95400	ASTM A351
19	Pin	Stainless Steel 304	ASTM A276
20	Sealing Ring	EPDM	ASTM D2000

#### Dimensions

Size	DN	L	F	D	E	G	H
2 1/2"	65	190	15.9	73	69.1	7.9	370
3"	80	203	15.9	88.9	84.9	7.9	420
4"	100	229	15.9	114.3	110.1	9.5	447
5"	125	254	15.9	139.7	135.5	9.5	547
6"	150	267	15.9	165.1	160.8	9.5	607
8"	200	292	19	216.3	211.6	11.1	754
10"	250	330	19	273	268.3	12.7	890
12"	300	356	19	323.9	318.3	12.7	1031



ANI Group